

## 1. General Description

---

The EM74HCS05 contains six inverters with open-drain outputs and Schmitt-trigger inputs. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of  $V_{CC}$ .

## 2. Features and Benefits

---

- Wide supply voltage range from 2.0 V to 6.0 V
- High noise immunity
- CMOS low power dissipation
- Latch-up performance exceeds 250 mA
- Unlimited rise and fall times
- Complies with JEDEC standards:
  - JESD8C (2.7 V to 3.6 V)
  - JESD7A (2.0 V to 6.0 V)
- ESD protection:
  - HBM ANSI/ESDA/JEDEC JS-001 Class 2 exceeds 3500 V
  - CDM ANSI/ESDA/JEDEC JS-002 Class C3 exceeds 2000 V
- Multiple package options

## EM74HCS05

Hex inverter with open-drain outputs and Schmitt-trigger inputs

### 3. Ordering Information

Table 1. Ordering information

Type number	Package		
	Name	Description	Quantity
EM74HCS05D	SOP-14L	plastic small outline package; 14 leads; body width 3.9 mm	3000
EM74HCS05PW	TSSOP-14L	plastic thin shrink small outline package; 14 leads; body width 4.4 mm	3000

### 4. Function Diagram

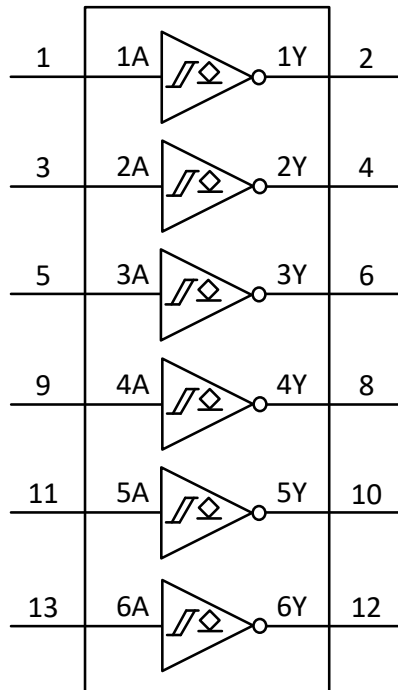


Fig. 1. Logic symbol

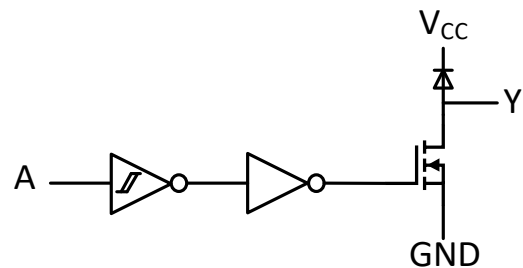



Fig. 2. Logic diagram(one gate)

## EM74HCS05

Hex inverter with open-drain outputs and Schmitt-trigger inputs

# 5. Pinning Information

## 5.1. Pinning

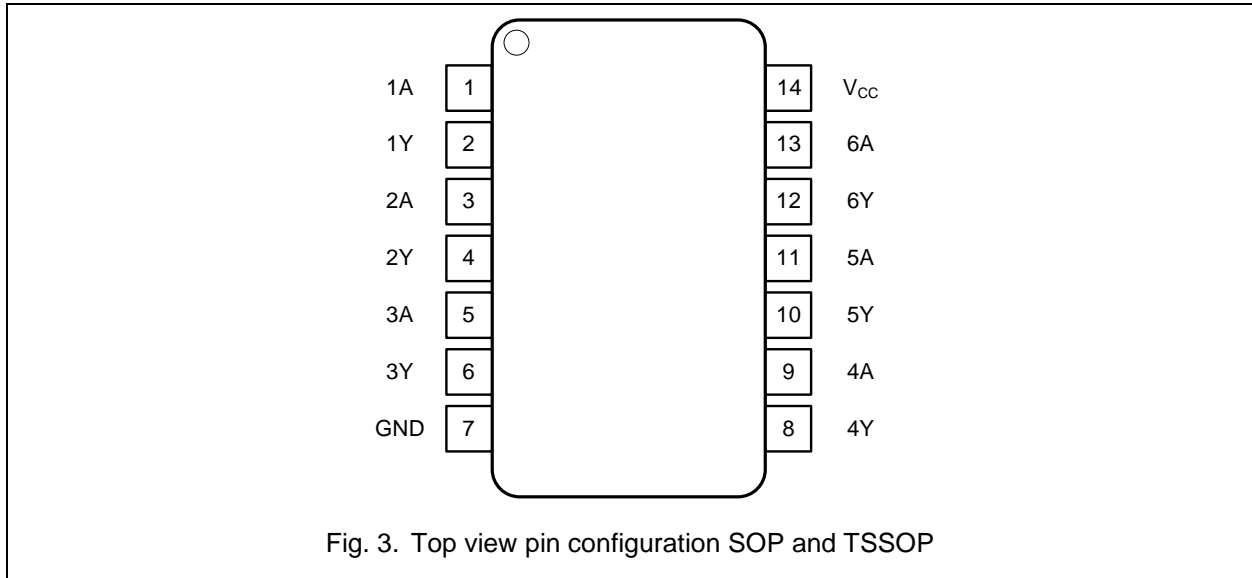

## 5.2. Pin description

Table 2. Pin description

Symbol	Pin	Description
1A to 6A	1, 3, 5, 9, 11, 13	Data input
1Y to 6Y	2, 4, 6, 8, 10, 12	Data output
GND	7	Ground (0V)
V <sub>cc</sub>	14	Supply voltage

# 6. Functional Description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; Z = high-impedance OFF-state.

Input	Output
nA	nY
L	Z
H	L