

1. General Description

The EMS23157 is a dual SPDT low on-resistance analog switch. It can operate from 1.5V to 5.5V power supply. The device offers low ON-state resistance and excellent ON-state resistance matching with break-before-make feature, to prevent signal distortion during the transferring of a signal from one channel to another. The device is capable of truly isolation. Even when A overrides V_{CC} , very little current will flow back to the supply.

2. Features and Benefits

- Wide Supply Range from 1.5 V to 5.5 V
- Low ON-state resistance, typically $1.9\ \Omega$ ($V_{CC}=5.5\text{ V}$)
- 1.8 V Compatible Control Logic Inputs
- High Off-Isolation: -80 dB @ 10 kHz
- Low Channel-to-Channel Crosstalk: -82 dB @ 10 kHz
- High Bandwidth (-3dB @ 800MHz) Suitable For USB2.0 High-Speed Routing
- Low Quiescent Current ($< 1\mu\text{A}$) when $V_{CC} = 3.3\text{ V}$

3. Applications

- Audio, Video, UART, USB2.0 Signal and Supply Routing
- Cell phones and TWS headset

EMS23157**Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation**


4. Ordering Information

Table 1. Ordering information

Type number	Topside marking	Package		
		Name	Description	Quantity
EMS23157MS	23157 XYYWW	MSOP-10L	MSOP package, 10 pins 3.0mm × 3.0mm; 1.1 mm (Max) height	3000

MARKING INFORMATION

NOTE: XYYWW = Vendor Code and Data Code.

X YY WW

5. Pinning Information

5.1. Pin map

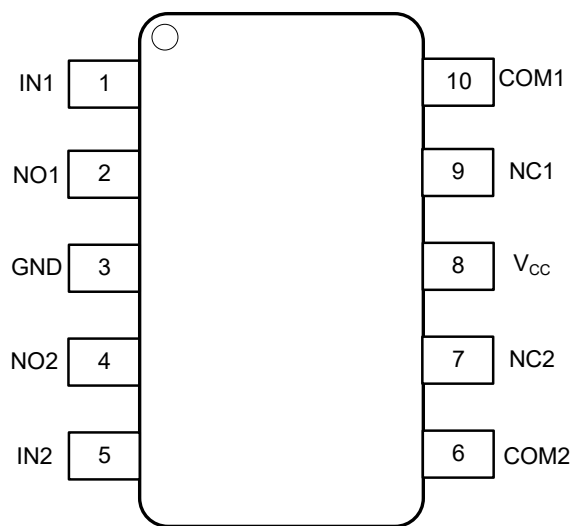


Fig 1. Top view pin configuration MSOP-10L

5.2. Pin description

Table 2. Pin description

Symbol	Pin	Description
IN1	1	Select pin for switch 1
NO1	2	Normally open I/O for switch 1
GND	3	Ground
NO2	4	Normally open I/O for switch 2
IN2	5	Select pin for switch 2
COM2	6	Common I/O for switch 2
NC2	7	Normally closed I/O for switch 2
V _{cc}	8	Power supply pin
NC1	9	Normally closed I/O for switch 1
COM1	10	Common I/O for switch 1

6.Functional Description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level.

IN	NC TO COM, COM TO NC	NO TO COM, COM TO NO
L	ON	OFF
H	OFF	ON

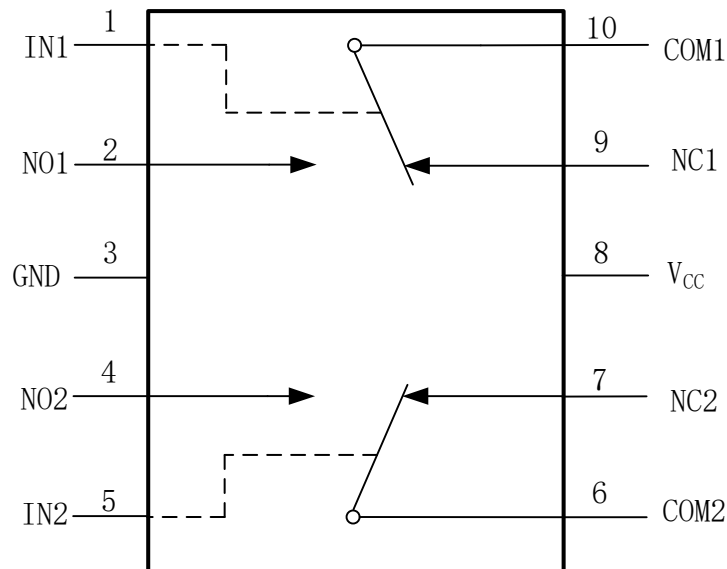


Fig 2. Analog Symbol

7. Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Table 4. Absolute Maximum Ratings

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND.

Symbol	Parameter	Conditions	Min	Max	Unit
V _{CC}	supply voltage		-0.3	6.5	V
V _{IN}	control Input Voltage		-0.3	6.5	V
V _A	signal input voltage		-0.3	6.5	V
I _A	continuous Current Through COM, NC, NO			±100	mA
	peak Current Through COM, NC, NO (pulsed at 1ms 50% duty cycle)			±200	mA
T _J	junction Temperature under Bias			150	°C
T _L	lead Temperature (Soldering, 10 seconds)			260	°C
R _{θJA}	thermal resistance			350	°C/W

8. Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. EnergyMath does not recommend exceeding them or designing to Absolute Maximum Ratings.

Table 5. Recommended Operating Conditions

Symbol	Parameter	Conditions	Min	Max	Unit
V _{CC}	supply voltage		1.5	5.5	V
V _{IN}	control input voltage		0	5.5	V
V _A	signal input voltage		0	V _{CC}	V
T _{amb}	ambient temperature		-40	125	°C

9. Electrical Characteristics

Table 6. Static characteristics
 $T_{amb}=25\text{ }^{\circ}\text{C}$, $V_{CC}=3.3\text{ V}$, unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
DC Electrical Characteristics						
V _{IH}	input logic high level	V _{CC} = 3.4 V to 5.5 V	1.6			V
		V _{CC} = 1.5 V to 3.3 V	1.4			V
V _{IL}	input logic low level	V _{CC} = 3.4 V to 5.5 V			0.6	V
		V _{CC} = 1.5 V to 3.3 V			0.4	V
I _{CC}	supply current	I _A = 0, V _{SEL} = 0 or V _{SEL} = V _{CC}			1.0	μA
ΔI _{CC}	additional supply current	I _A = 0, V _{CC} = 2.5 V or 4.2 V V _{SEL} = 1.6 V			3.0	μA
I _{off}	OFF-state switch leakage current from COM to NC (or NO)	V _A = 5 V , V _{NC} or V _{NO} = 0 V			±2.0	μA
R _{ON}	on-resistance	V _{CC} = 3.5 V , V _A = 0.8 V to 2.0 V, I _A = 10 mA		3.4	4.0	Ω
		V _{CC} = 4.5 V , V _A = 0.8 V to 2.3 V, I _A = 10 mA		2.4	3.0	Ω
		V _{CC} = 5.5 V , V _A = 0.8 V to 2.6 V, I _A = 10 mA		1.9	2.5	Ω
R _{FLAT}	on-resistance flatness	V _{CC} = 3.5 V , V _A = 0.8 V to 2.0 V, I _A = 10 mA		0.2	0.5	Ω
		V _{CC} = 4.5 V , V _A = 0.8 V to 2.3 V, I _A = 10 mA		0.25	0.5	Ω
		V _{CC} = 5.5 V , V _A = 0.8 V to 2.6 V, I _A = 10 mA		0.3	0.5	Ω
ΔR _{ON}	on-resistance matching between channels	V _{CC} = 3.5 V , V _A = 0.8 V to 2.0 V, I _A = 10 mA		0.1	0.2	Ω
		V _{CC} = 4.5 V , V _A = 0.8 V to 2.3 V, I _A = 10 mA		0.1	0.2	Ω
		V _{CC} = 5.5 V , V _A = 0.8 V to 2.6 V, I _A = 10 mA		0.1	0.2	Ω
AC Electronics Characteristics						
t _{ON}	turn-On Time	V _A =1.5V, C _L =50pF, R _L =50Ω		470		ns
t _{OFF}	turn-Off Time	V _A =1.5V, C _L =50pF, R _L =50Ω		120		ns
t _{BBM}	break-before-make time	V _A =1.5V, C _L =50pF, R _L =50Ω		600		ns
BW	-3dB Bandwidth	C _L =0pF		800		MHz


EMS23157

Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
OIRR	off isolation	f=10 KHz		-80		dB
		f=240 MHz		-31		dB
X _{TALK}	crosstalk	f=10 KHz		-82		dB
		f=240 MHz		-26		dB
THD	total harmonic distortion	f=20Hz to 20KHz V _A =600mV _{pp} , R _L =32Ω		-80		dB
Capacitance						
C _{ON}	On Capacitance	f=100KHz		12		pF
C _{OFF}	Off Capacitance	f=100KHz		4		pF

10. Package Outline

MSOP-10L

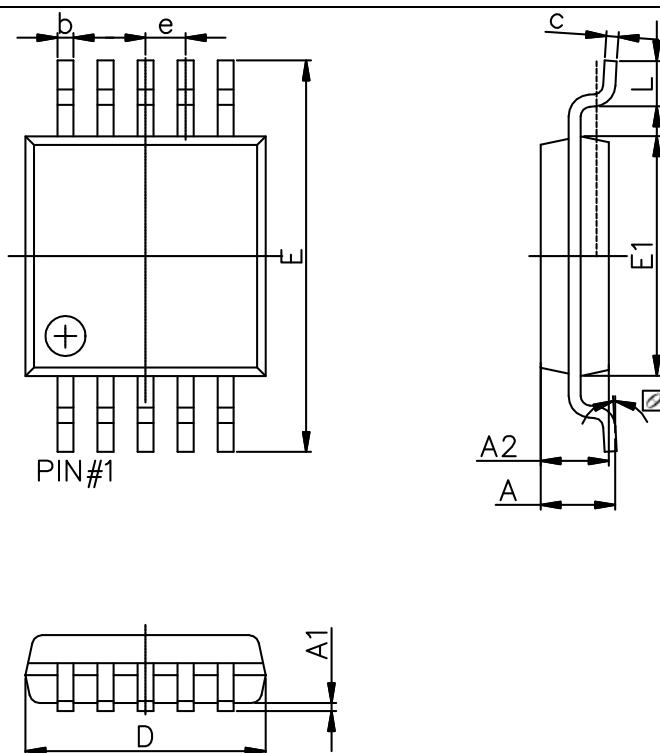

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	---	1.100	---	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.180	0.330	0.007	0.013
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
e	0.500(BSC)		0.020(BSC)	
E	4.750	5.050	0.187	0.199
E1	2.900	3.100	0.114	0.122
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

11. Tape and Reel Information

11.1. Carrier tape dimensions

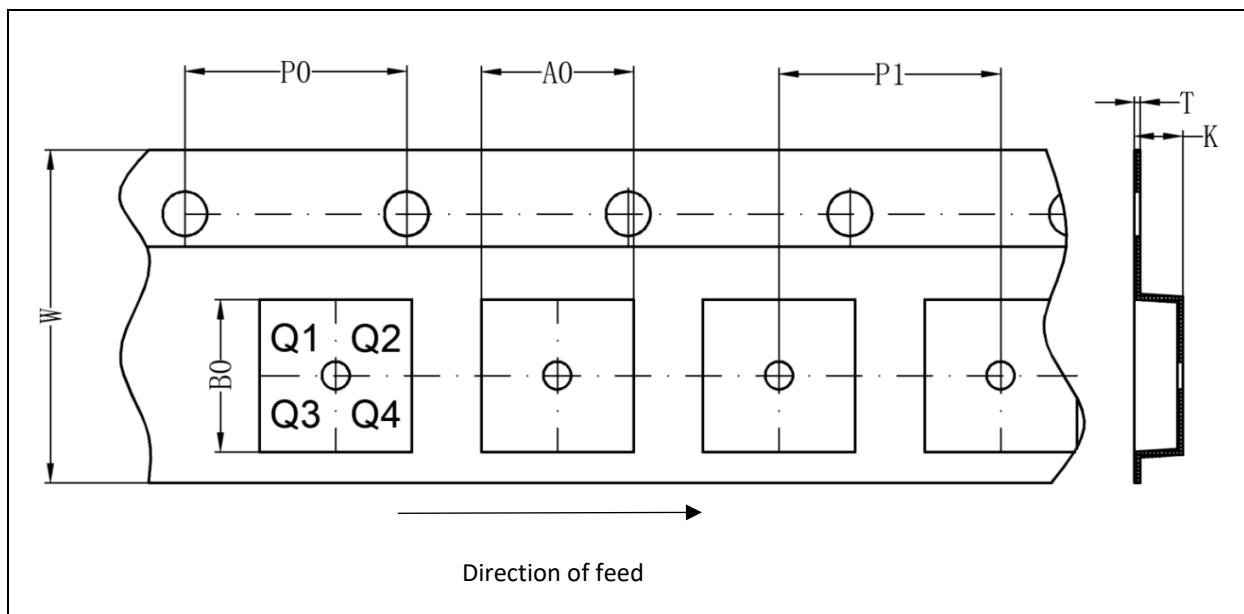


Table 7. Carrier tape dimensions

Package version	A0(mm)	B0(mm)	K0(mm)	T(mm)	P1(mm)	W(mm)	P0(mm)	PIN 1
MSOP-10L	5.3	3.4	1.4	0.25	8	12	4	Q1

11.2. Reel and box dimensions

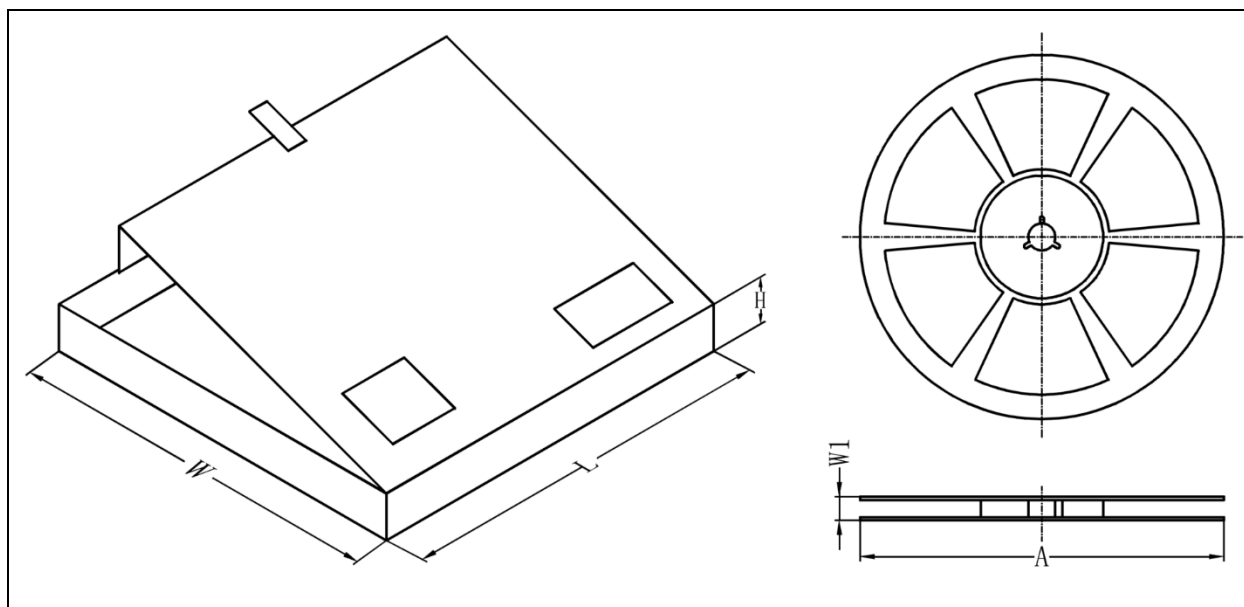


Table 8. Dimensions and quantities

Package version	Type NO. ending	Reel Dimension A (mm)	Reel Width W1 (mm)	SPQ (pcs)[1]	Reels per box	Outer box dimensions L×W×H(mm)[2]
MSOP-10L	MS	330	17.6	3000	1	358x340x50

[1] Packing quantity dependent on specific product type. Please contact your local Energymath representative for ordering.

[2] Dimensions for reference only.

EMS23157

Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation

12. Revision History

Table 9. Revision history

Document ID	Release Date	Data sheet status	Change notice	Supersedes
EMS23157 Rev. 1.4	Mar 10, 2026	Product datasheet		EMS23157 Rev. 1.3
Modifications:	Fig.2 Analog symbol added.			
EMS23157 Rev. 1.3	Dec 15, 2025	Product datasheet		EMS23157 Rev. 1.2
Modifications:	- Table 1: topside marking information updated - Section 11: Added tape and reel information.			
EMS23157 Rev. 1.2	May 10, 2025	Product datasheet		EMS23157 Rev. 1.1
Modifications:	Table6 : RFLAT updated.			
EMS23157 Rev. 1.1	Mar 20, 2025	Product datasheet		EMS23157 Rev. 1.0
Modifications:	Table6: OIRR and X_{TALK} updated.			
EMS23157 Rev. 1.0	Feb 13, 2024	Product datasheet		